




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 7 : <b>G06F 1/00</b>	<b>A1</b>	(11) International Publication Number: <b>WO 00/17731</b> (43) International Publication Date: 30 March 2000 (30.03.00)
(21) International Application Number: PCT/US99/21089 (22) International Filing Date: 15 September 1999 (15.09.99) (30) Priority Data: 09/159,069 23 September 1998 (23.09.98) US (71)(72) Applicant and Inventor: MCBRIDE, Randall, C. [US/US]; 7331 County Road 1, Montrose, CO 81401 (US). (74) Agents: GRAZIANO, James, M. et al.; Suite 140, 1790 30th Street, Boulder, CO 80301-1018 (US).		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

(54) Title: VOLATILE KEY APPARATUS FOR SAFEGUARDING CONFIDENTIAL DATA STORED IN A COMPUTER SYSTEM MEMORY

## (57) Abstract

The data security system uses a volatile key apparatus to create and manage a master file, comprising a single encrypted file that is stored on the hard drive of the computer system. The master file contains all of the passwords, cryptokeys and security codes that are used by conventional security programs and apparatus resident on the computer system to safeguard the confidential data that is contained in the memory of the computer system. The master key that is used to encrypt and decrypt this master file is stored in the volatile key apparatus, which is a piece of hardware located in the personal computer and directly connected to the system bus. When a violation of the system security procedures is detected, the master key is erased from the volatile key apparatus, thereby preventing access to the encrypted information that is stored on the hard drive. The encryption protected data can still be retrieved from the hard drive by the authorized user reinstalling the master key in the volatile key apparatus, thereby enabling decryption of the encrypted passwords, cryptokeys and security codes that are stored in the master file. The conventional security programs and apparatus resident on the computer system can then use the contents of the master file to retrieve the encrypted data from the memory.

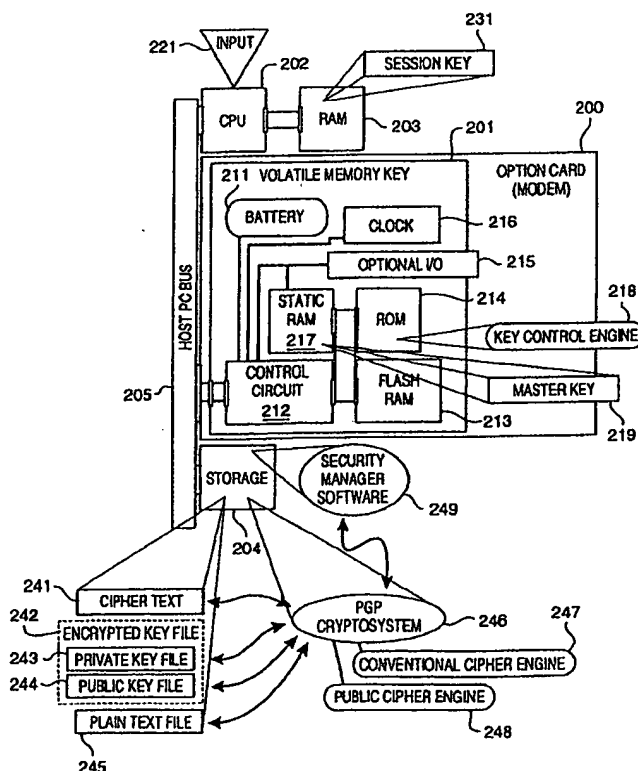

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

# **VOLATILE KEY APPARATUS FOR SAFEGUARDING CONFIDENTIAL DATA STORED IN A COMPUTER SYSTEM MEMORY**

## **Field of the Invention**

This invention relates to computer systems and, in particular, to a volatile key apparatus that creates an encrypted master file to securely store all of the passwords, security codes and cryptokeys that are used to safeguard the contents of a computer memory.

5

## **Problem**

It is a problem in the field of computer systems to provide an effective manner of safeguarding the integrity of data that is stored in memory. In most computer and data storage systems, the privacy of computer data can be compromised without undue effort due to a lack of security measures installed on such systems. In computer systems that implement data security, the users typically find the data security systems either burdensome to use or largely ineffective in their operation.

In the field of personal computer systems, the data that is stored thereon is typically intended to remain private to the particular user who creates the data. This data can comprise medical, financial, legal, political and personal information that the user has collected and stored in a conveniently accessible manner by writing into the memory of the personal computer. The security of this information can be ensured to a certain degree by the use of computer passwords, which prevent an unauthorized user from activating the computer system. The password system prevents the system from booting and therefore prevents the unauthorized user from being able to access the data that is stored on the hard drive. However, this password system can be thwarted in a number of ways. The unauthorized user can boot the system from a floppy disk thereby bypassing the password protection. Alternatively, the unauthorized user can remove the hard drive and install it on a personal computer that is not password protected. A third mode of attack comprises the use of a brute force attack where the unauthorized user submits a series of likely passwords until a password match is attained. The number of passwords submitted can be large, and if the password system is of limited capability, such an attack can be effective.

An alternative method of data security is obtained by the use of cryptosystems, wherein the stored data is encrypted using a user provided cryptokey. The use of cryptography is commonly used in the transmission of secure data over a non-secure

transmission medium, such as the telephone lines, or over the Internet. When the data stored on a personal computer memory is encrypted, the cryptokey is typically also stored on the same memory, thereby subjecting the cryptokey system to being by comprised. This can be accomplished by obtaining access to the personal  
5 computer and subjecting the cryptokey system to a brute force attack by the submission of a large number of cryptokeys.

A further dimension to the problem is that the users have an ever increasing number of passwords and cryptokeys to remember. Users typically write down the passwords and cryptokeys, thereby compromising the effectiveness of the security  
10 system. The basic encryption system also requires that specific information, such as the encryption key be available for use by the security system. The encryption key can be stored on removable media to increase security, but loading the security key floppy can be a nuisance, thereby reducing the probability that the user will maintain the system. The user is likely to store the data on the hard disk for convenience or  
15 leave the floppy disk in a readily accessible area.

U.S. Patent No. 5,515,540 discloses a microprocessor that has improved security against tampering, including attempts at active tampering. A battery-backed microcontroller includes encryption and power management functions, and is combined with a battery and a volatile semiconductor memory. The microcontroller  
20 supplies power to the semiconductor memory. When a security violation is detected, the microcontroller wipes its encryption registers and grounds the power output pin to the memory. This operation destroys all of the data that is stored in the memory. Unfortunately, this system cannot simply recover from a security violation, since all of the data is erased.

## 25 Solution

The above described problems are solved and a technical advance achieved by the present data security system which uses a volatile key apparatus to create and manage a master file, comprising a single encrypted file that is stored on the hard drive of the computer system. The master file contains all of the passwords,  
30 cryptokeys and security codes that are used by conventional security programs and apparatus resident on the computer system to safeguard the confidential data that is contained in the memory of the computer system. The master key that is used to

encrypt and decrypt this master file is stored in the volatile key apparatus, which is a piece of hardware located in the personal computer and directly connected to the system bus. When a violation of the system security procedures is detected, the master key is erased from the volatile key apparatus, thereby preventing access to the encrypted information that is stored on the hard drive. The encryption protected data can still be retrieved from the hard drive by the authorized user reinstalling the master key in the volatile key apparatus, thereby enabling decryption of the encrypted passwords, cryptokeys and security codes that are stored in the master file. The conventional security programs and apparatus resident on the computer system can then use the contents of the master file to retrieve the encrypted data from the memory.

The present data security system can be activated by a security violation that is detected by ancillary equipment, such as that disclosed in U.S. Patent No. 5,675,321, or in response to a brute force attack on the password system. The present data security system can be integrated with such ancillary equipment or can represent a separate security system. In either case, by combining an effective software cryptosystem, such as PGP Cryptosystem, with the volatile key apparatus, a high level of data security for the confidential data stored on the computer system memory can be attained.

#### **Brief Description of the Drawing**

Figure 1 illustrates in block diagram form the basic architecture of a typical computer system that is used to implement the present data security system;

Figure 2 illustrates in block diagram form the architecture of the present data security system as implemented in a personal computer system, such as that shown in Figure 1; and

Figures 3 and 4 illustrate in flow diagram form the operation of the present data security system to decrypt an encrypted file using the master key.

#### **Detailed Description**

Figure 1 illustrates in block diagram form the basic architecture of a typical computer system that is used to implement the present data security system. Figure 1 and the following discussion are intended to provide a brief, general description of a suitable computing environment in which the invention may be implemented. Those

skilled in the art will appreciate that the invention may be practiced with other computer system configurations, including hand-held devices, multi-processor systems, microprocessor-based or programmable consumer electronics, network PCS, minicomputers, mainframe computers, and the like. The invention may also be  
5 practiced in distributed computing environments where tasks are performed by remote processing devices that are linked through a communications network. In a distributed computing environment, program modules may be located in both local and remote memory storage devices.

With reference to Figure 1, an exemplary system for implementing the invention  
10 includes a general purpose computing device in the form of a conventional personal computer 100, which comprises a processing module 110, including a processing unit 120, a system memory 130, and a system bus 121 that couples various system components including the system memory 130 to the processing unit 120. The system bus 121 may be any of several types of bus structures including a memory bus  
15 or memory controller, a peripheral bus, and a local bus using any of a variety of bus architectures. The system memory 130 includes read only memory (ROM) 131 and random access memory (RAM) 132. A basic input/output system 133 (BIOS), containing the basic routines that helps to transfer information between elements within the personal computer 100, such as during start-up, is stored in ROM 131. The  
20 personal computer 100 further includes a hard disk drive 140 for reading from and writing to a hard disk, a magnetic disk drive 151 for reading from or writing to a removable magnetic disk 152, and an optical disk drive 155 for reading from or writing to a removable optical disk 156 such as a CD ROM or other optical media. The hard disk drive 141, magnetic disk drive 151, and optical disk drive 155 are connected to  
25 the system bus 121 by a hard disk drive interface 140, a magnetic disk drive interface 150, and an optical drive interface 155, respectively. The drives and their associated computer-readable media provide nonvolatile storage of the operating system 144, application programs 145, other program modules 146 and other program data 147 for the personal computer 100. Although the exemplary environment described herein  
30 employs a hard disk, a removable magnetic disk 152 and a removable optical disk 156, it should be appreciated by those skilled in the art that other types of computer readable media which can store data that is accessible by a computer, such as

magnetic cassettes, flash memory cards, digital video disks, Bernoulli cartridge, random access memories (RAMs), read only memories (ROM), and the like, may also be used in the exemplary operating environment. A number of program modules may be stored on the hard disk, magnetic disk 152, optical disk 156, ROM 131 or as shown in RAM 132, including an operating system 134, one or more application programs 135, other program modules 136, and program data 137. A user may enter commands and information into the personal computer 100 through input devices such as a keyboard 162 and pointing device 161. Other input devices (not shown) may include a microphone, joystick, game pad, satellite dish, scanner, or the like. These and other input devices are often connected to the processing unit 120 through a serial port interface 160 that is coupled to the system bus 121, but may be connected by other interfaces, such as a parallel port, game port or a universal serial bus (USB). A monitor 191 or other type of display device is also connected to the system bus 121 via an interface, such as a video adapter 190. In addition to the monitor 191, personal computers 100 typically include other peripheral output devices, such as speakers 197 and printers 196. The personal computer 100 may operate in a networked environment using logical connections to one or more remote computers, such as a remote computer 180. The remote computer 180 may be another personal computer, a server, a router, a network PC, a peer device or other common network node, and typically includes many or all of the elements described above relative to the personal computer 100. The logical connections depicted in Figure 1 include a local area network (LAN) 171 and a wide area network (WAN) 173. Such networking environments are commonplace in offices, enterprise-wide computer networks, intranets and the Internet.

When used in a LAN networking environment, the personal computer 100 is connected to the local network 171 through a network interface or adapter 170. When used in a WAN networking environment, the personal computer 100 typically includes a modem 172 or other means for establishing communications over the wide area network 173, such as the Internet. The modem 172, which may be internal or external, is connected to the system bus 121 via the serial port interface 160. In a networked environment, program modules depicted relative to the personal computer 100, or portions thereof, may be stored in the remote memory storage device 185. It

will be appreciated that the network connections shown are exemplary and other means of establishing a communications link between the computers may be used.

### **Security System Architecture**

Figure 2 illustrates in block diagram form the architecture of the present data security system 200 as implemented in a personal computer system, of the type shown in Figure 1, and Figures 3 and 4 illustrate in flow diagram form the operation of the present data security system 200 to decrypt an encrypted file using the master key.

In a computer system, the information stored thereon can be segmented into discrete categories: application programs, non-critical application data, critical application data. The application programs represent the typical commercially available word processing, communications and database programs that do not warrant any degree of security protection, since they are commodity elements that can easily be replaced. Likewise, there is a large volume of computer data that is generated pursuant to the use of the application program that represents non-critical data, whose retrieval by an unauthorized party would not represent a significant security breach. However, the last class of data comprises the sensitive, user-specific information, such as medical, financial, legal, political and personal information that the user has collected and stored in the memory of the computer system. This critical data, whether formatted for transmission or simply for storage in the personal computer system memory, should be safeguarded using an effective data security system.

The present data security system 200 enables the computer system to encrypt and decrypt these critical files using a cryptosystem, such as the commercially available PGP Cryptosystem 246 that is stored in memory 204 and that executes on CPU 202 while safeguarding the cryptokeys used by this cryptosystem 246. In the traditional cryptosystem operation, the PGP Cryptosystem 246 encrypts and decrypts data files using two separate cipher engines 247, 248 to maximize both security and efficiency. One cipher engine, conventional cipher engine 247, comprises a fast process that uses a single key to both encrypt and decrypt the data. The problem with using the conventional cipher engine 247 is that the single key is difficult to secure in terms of its transmission between sender and receiver. To overcome this problem,

a second cipher engine, public cipher engine 248, is used to implement a public key cipher function wherein the sender uses a publicly known key to send a message that can only be read with the recipient's private key. The two cipher engines 247, 248 operate together and include a process that is invisible to the user that creates a temporary random single cryptokey for each "session" to encrypt the plain text file using the conventional cipher engine. The recipient's public key is used to encrypt this temporary cryptokey (session key 231). The public key encrypted session key 231 is then transmitted along with the cipher text to the recipient. The recipient uses their private cryptokey to recover the session key 231 and then uses that single key to run the fast conventional cipher engine 247 to decrypt the ciphertext message. Thus, the public cipher engine 248 is only used to securely send the session key 231. The problem with this system is that the cryptosystem 246 must maintain the private key under the recipient's physical control for the system to be operational. The need for physical control means that the private key is stored on the hard drive 204 for convenience and may only be protected from unauthorized access by means of a password, if such a function is even used. The passwords are typically stored in Flash RAM 213.

The present data security system 200 provides an additional level of security to this cryptokey system by safeguarding the private key that is stored in the memory 204 of the personal computer system. This is accomplished by the storage of the passwords, access codes and cryptokeys that are used by the conventional security programs and apparatus resident on the computer system in encrypted form in the memory 204 in a master file 242. This renders this security information unusable to the unauthorized user without the availability of the master key to decrypt these stored passwords, access codes and cryptokeys.

#### **Operation of the Security System**

When an application must decrypt a data file, access code, password, or cryptokey (collectively termed "data file" herein for simplicity) that is stored in memory 204 in encrypted form, the application at step 301 calls the cryptosystem 246 to execute the decryption process. The cryptosystem 246 begins the decryption process by calling for the private key 243 for this data file at step 302. The private key is located in the master file 242 in memory 204 and is retrieved by the cryptosystem 246

15 Security Integrity Verification

One method of tamper deterrence is the generation of a checksum on the PGP Cipher engines 247, 248. Thus, all of the sensitive encryption instruction codes are maintained in a single file, with the generated checksum being usable to detect alteration of the file contents. The checksum result is stored in the volatile memory 217 with the master key. Thus, at step 402, the key control engine 218 runs a security check of the two cipher engines 247, 248 that comprises the cryptosystem 246 that runs on CPU 202. The key control engine 218 runs a checksum on both the cipher engines 247, 248 and the lock out instructions to ensure that neither has been tampered with. If a security violation is detected, then processing advances to step 410 as described below.

The control circuit 212 also maintains a record of all password attempts and their frequency. An internal clock 216 is used to track the elapsed time between attempted accesses to the password Flash RAM 213. Passwords that are submitted by a user are matched by the control circuit 212 and are unavailable to the CPU 202.

5 Therefore, the CPU 202 cannot be used to compromise the operation of the control circuit 212 and the contents of the Flash RAM 213 and ROM 214. The control circuit 212 at step 403 determines the frequency of unsuccessful password attempts and at step 404, if the measured frequency exceeds a predetermined threshold, then a security violation is detected, and processing advances to step 410 as described

10 below. If there is no indication of tampering, the master key is passed to the CPU at step 305 and used in the conventional cipher engine to produce the decrypted access code.

In the event that the computer system or volatile key apparatus 201 determines a violation of security, such as a brute force attack, at step 410 the volatile key

15 apparatus 201 erases the contents of the volatile memory 217 thereby eliminating the master key 219 as well as the checksum.

Without the master key 219, to decrypt the private key 243, a session key 231 cannot be produced and without the session key 231, the ciphertext 241 can not be decrypted. The authorized user can restore the master key 219, in the volatile key

20 apparatus 201 of the personal computer from a copy of the master key which has been maintained in a disparate secure location, such as a safe deposit box. The volatile key apparatus 201 can be initialized using interface software 221 that function as an application program on the personal computer. The volatile key apparatus 201 is typically seeded with a stock password, such as "11...11" and the user can then

25 program in their own personally selected password. Using the stock password key, the user can access the volatile key apparatus 201 and create a master key. The master key can then be copied and placed in safe keeping in a location disparate from the personal computer. The created passwords are stored in Flash RAM 213.

A further deterrent is the use of the data security system 201 which signals the

30 control circuit 212 via dedicated signal conductors and the I/O port of the control circuit 212. The received signals are used to determine whether physical tampering of the personal computer has occurred. Even if the contents of the volatile memory 217 are

erased, the information stored therein can be reloaded by the user providing the master key 219. The power provided to operate the control circuit 212 and the volatile memory 217 are provided by a separate battery 211 that is used to power these circuit elements.

5

### Summary

The data security system uses a volatile key apparatus to create and manage a master file, comprising a single encrypted file that contains all of the passwords, cryptokeys and security codes that are used by conventional security programs and apparatus resident on the computer system to safeguard the confidential data that is contained in the memory of the computer system. The master key that is used to encrypt and decrypt this master file is stored in the volatile key apparatus, which is a piece of hardware located in the personal computer and directly connected to the system bus. When a violation of the system security procedures is detected, the master key is erased from the volatile key apparatus, thereby preventing access to the encrypted information that is stored on the hard drive.

10

15

**What is Claimed:**

1. A data security system for preventing unauthorized access to at least one encrypted data file stored in a computer system memory, comprising:
  - means for encrypting at least one cryptokey that is used to decrypt said at least one encrypted data file, using a master key;
  - 5 means for storing said encrypted at least one cryptokey;
  - volatile memory means for storing said master key; and
  - means, responsive to a request to decrypt said at least one encrypted data file, for generating said at least one cryptokey from said encrypted at least one cryptokey using said master key.
2. The data security system of claim 1 wherein said data security system further comprises:
  - means for detecting a security violation; and
  - means, responsive to a detected security violation, for erasing said master key
  - 5 from said volatile memory means.
3. The data security system of claim 2 wherein said means for detecting a security violation comprises:
  - means for detecting an attempt at unauthorized access to said at least one encrypted data file.
4. The data security system of claim 2 wherein said means for detecting a security violation comprises:
  - means for detecting an anomaly in said means for encrypting.
5. The data security system of claim 1 wherein said means for generating comprises:
  - means for decrypting said at least one cryptokey from said encrypted at least one cryptokey;
  - 5 key control means for regulating generation of said at least one cryptokey;

security manager means, responsive to said request to decrypt said at least one encrypted data file, for switching control of a processor in said computer system to said key control means; and

10 wherein said key control means is responsive to receipt of control of said processor for transmitting said master key to said means for decrypting to produce said at least one cryptokey.

6. The data security system of claim 5 wherein said key control means is responsive to generation of said at least one cryptokey for erasing said master key from said processor.

7. The data security system of claim 2 further comprising:  
means, responsive to said means for erasing having removed said master key from said volatile memory means, for enabling an authorized user to rewrite said master key into said volatile memory means.

8. A method of operating a data security system to prevent unauthorized access to at least one encrypted data file stored in a computer system memory, comprising the steps of:

5 encrypting at least one cryptokey that is used to decrypt said at least one encrypted data file, using a master key;  
storing said encrypted at least one cryptokey in a master file memory;  
storing said master key in a volatile memory; and  
generating, in response to a request to decrypt said at least one encrypted data file, said at least one cryptokey from said encrypted at least one cryptokey using said  
10 master key.

9. The method of operating a data security system of claim 8 wherein said method further comprises the steps of:

detecting a security violation; and  
erasing, in response to a detected security violation, said master key from said  
5 volatile memory.

10. The method of operating a data security system of claim 9 wherein said step of detecting a security violation comprises:

detecting an attempt at unauthorized access to said at least one encrypted data file.

11. The method of operating a data security system of claim 9 wherein said step of detecting a security violation comprises:

detecting an anomaly in said step of encrypting.

12. The method of operating a data security system of claim 8 wherein said step of generating comprises:

decrypting in a cipher engine said at least one cryptokey from said encrypted at least one cryptokey;

5 regulating generation of said at least one cryptokey;

switching control of a processor in said computer system to said key control means in response to said request to decrypt said at least one encrypted data file; and

10 wherein said step of regulating generation is responsive to receipt of control of said processor for transmitting said master key to said cipher engine to produce said at least one cryptokey.

13. The method of operating a data security system of claim 12 wherein said step of regulating generation is responsive to generation of said at least one cryptokey for erasing said master key from said processor.

14. The method of operating a data security system of claim 9 further comprising the step of:

5 enabling, in response to said step of erasing having removed said master key from said volatile memory, an authorized user to rewrite said master key into said volatile memory.

15. A data security system for preventing unauthorized access to at least one encrypted data file stored in a computer system memory, comprising:

cipher engine means for encrypting a data file using a cryptokey that is also capable of decrypting said data file;

5 means for storing said encrypted data file;

means for encrypting said cryptokey using a master key;

means for storing said encrypted cryptokey in a master file memory;

volatile memory means for storing said master key; and

10 means, responsive to a request to decrypt said at least one encrypted data file, for generating said cryptokey from said encrypted cryptokey stored in said master file memory using said master key.

16. The data security system of claim 15 wherein said data security system further comprises:

means for detecting a security violation; and

5 means, responsive to a detected security violation, for erasing said master key from said volatile memory means.

17. The data security system of claim 15 wherein said means for generating comprises:

means for decrypting said cryptokey from said encrypted cryptokey;

key control means for regulating generation of said cryptokey;

5 security manager means, responsive to said request to decrypt said encrypted data file, for switching control of a processor in said computer system to said key control means; and

10 wherein said key control means is responsive to receipt of control of said processor for transmitting said master key to said means for decrypting to produce said cryptokey.

18. The data security system of claim 17 wherein said key control means is responsive to generation of said cryptokey for erasing said master key from said processor.

19. A method of operating a data security system for preventing unauthorized access to at least one encrypted data file stored in a computer system memory, comprising the steps of:

- encrypting, in a cipher engine, a data file using a cryptokey that is also capable
- 5 of decrypting said data file;
- storing said encrypted data file;
- encrypting said cryptokey using a master key;
- storing said encrypted cryptokey in a master file memory;
- storing said master key in a volatile memory; and
- 10 generating, in response to a request to decrypt said encrypted data file, said cryptokey from said encrypted cryptokey stored in said master file memory using said master key.

20. The method of operating a data security system of claim 19 wherein said method further comprises the steps of:

- detecting a security violation; and
- erasing, in response to a detected security violation, said master key from said
- 5 volatile memory.

21. The method of operating a data security system of claim 19 wherein said step of generating comprises:

- decrypting said cryptokey from said encrypted cryptokey;
- regulating generation of said cryptokey;
- 5 switching, in response to said request to decrypt said encrypted data file, control of a processor in said computer system to said step of regulating generation; and
- wherein said step of regulating generation is responsive to receipt of control of said processor for transmitting said master key to said cipher engine to produce said
- 10 cryptokey.

22. The method of operating a data security system of claim 19 wherein said step of regulating generation is responsive to generation of said cryptokey for erasing said master key from said processor.

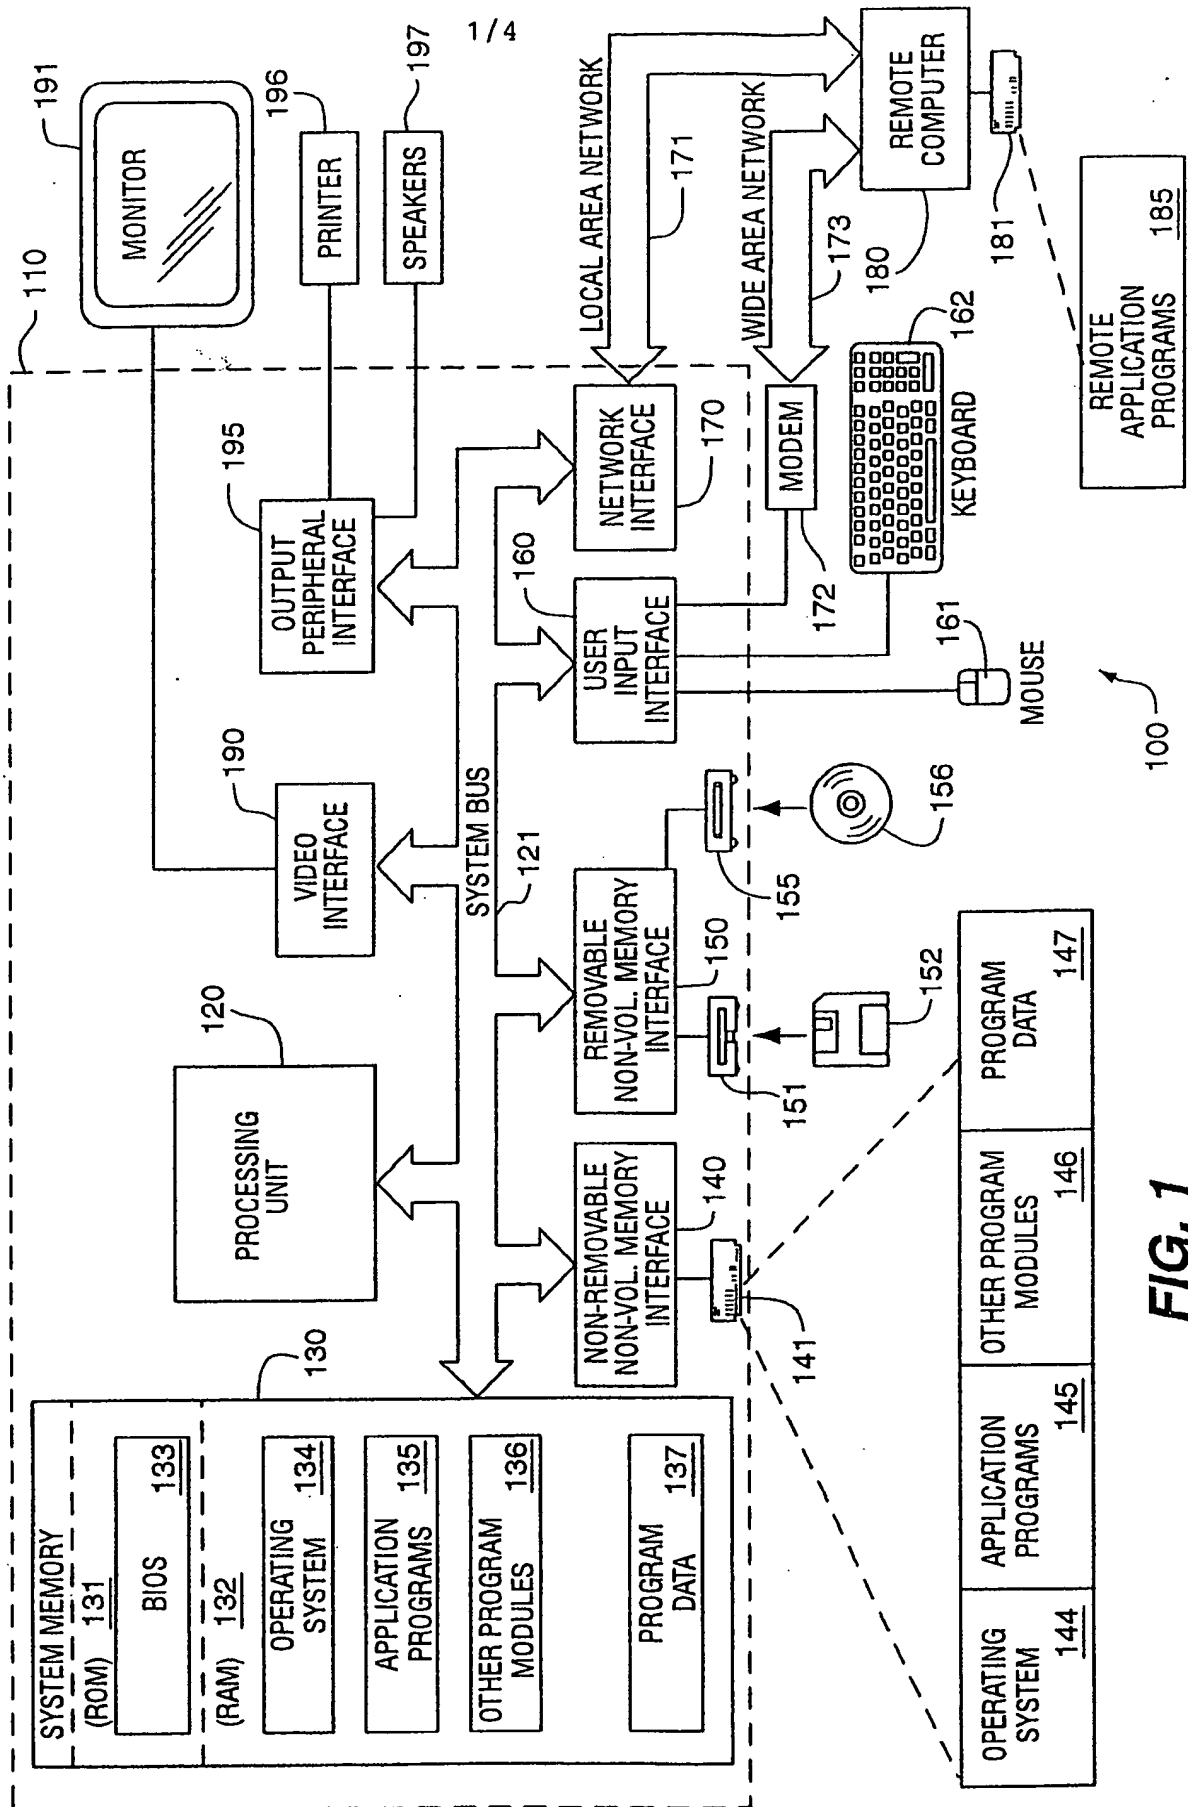
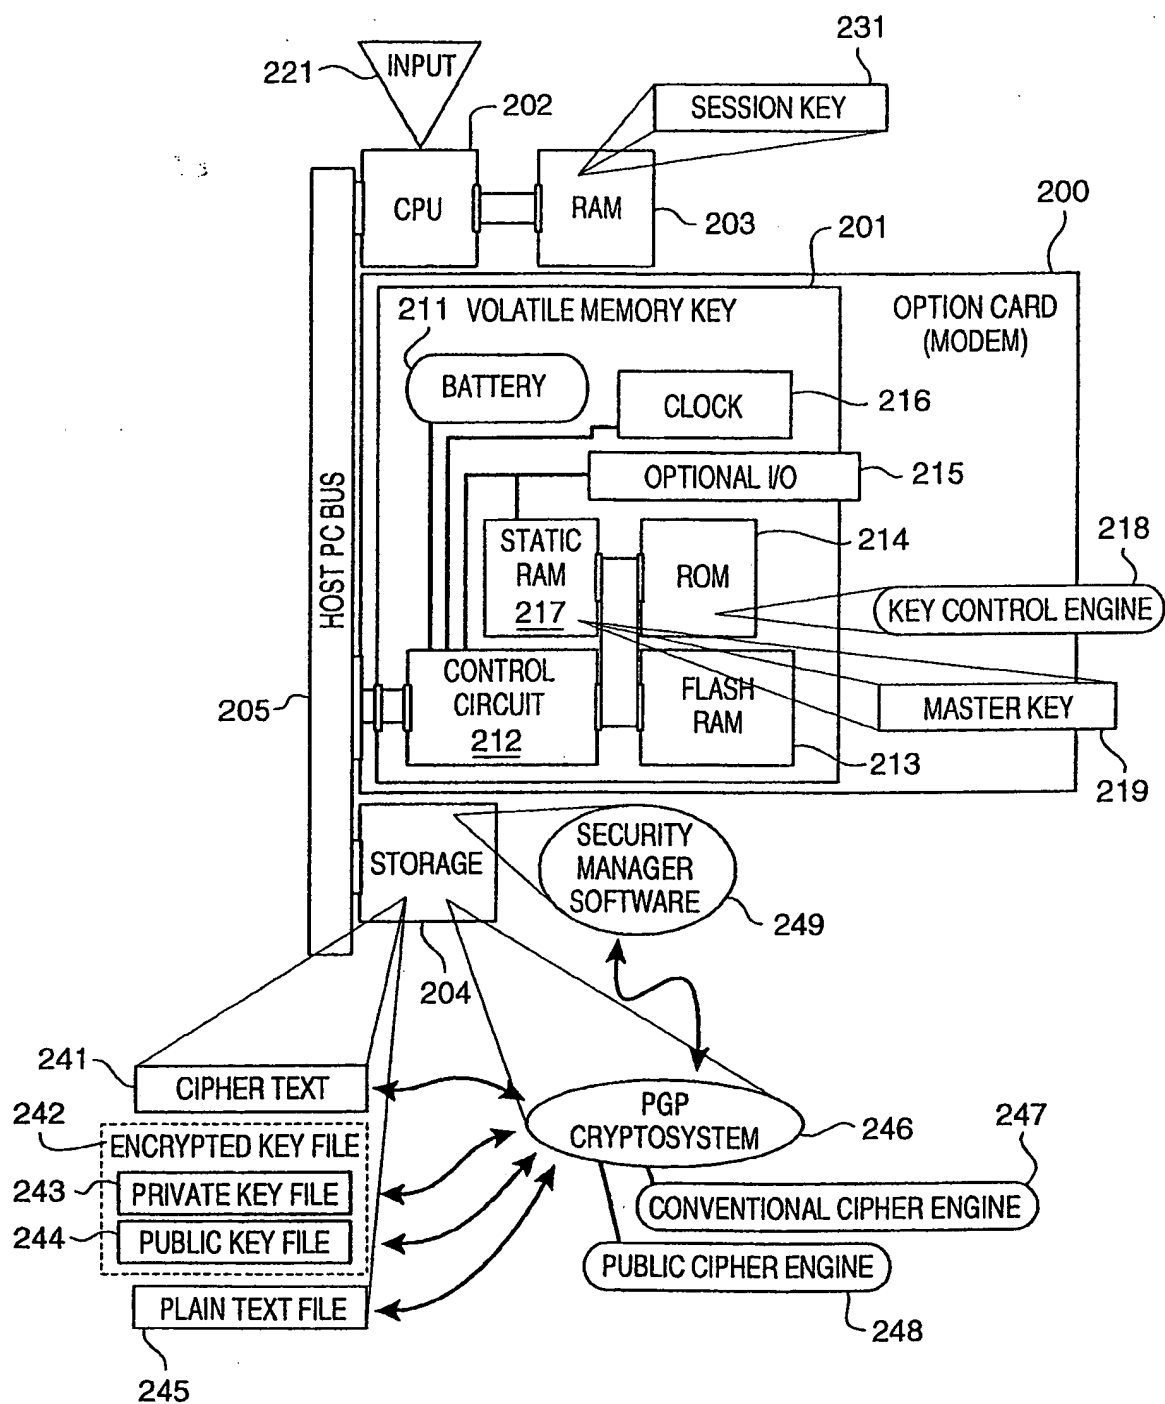
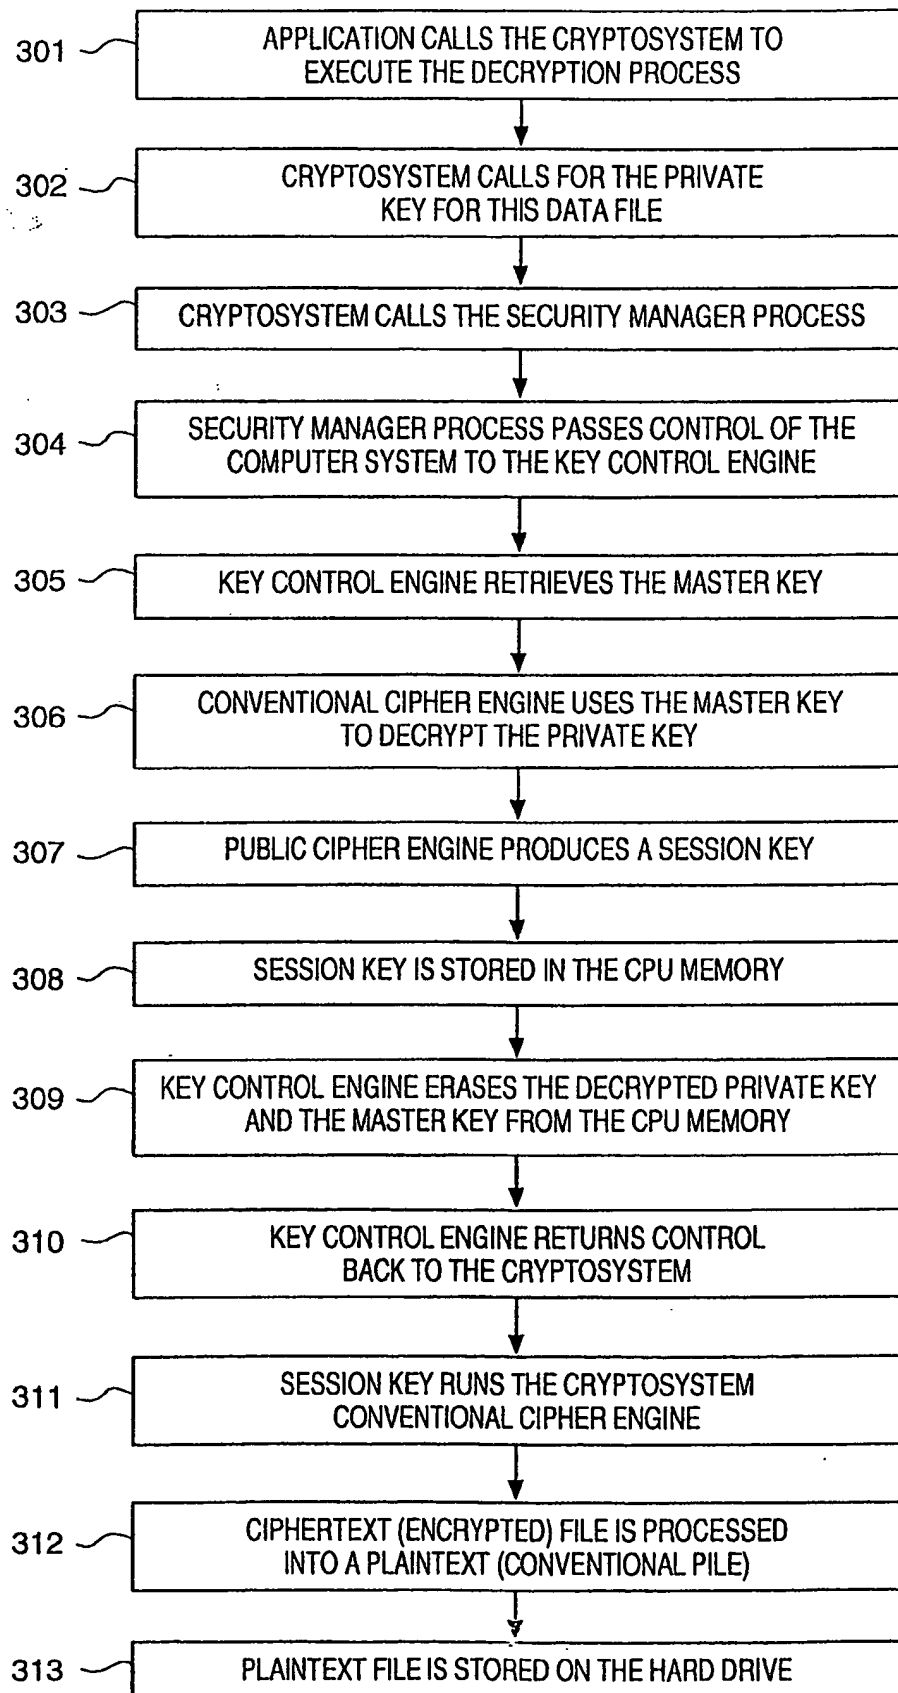
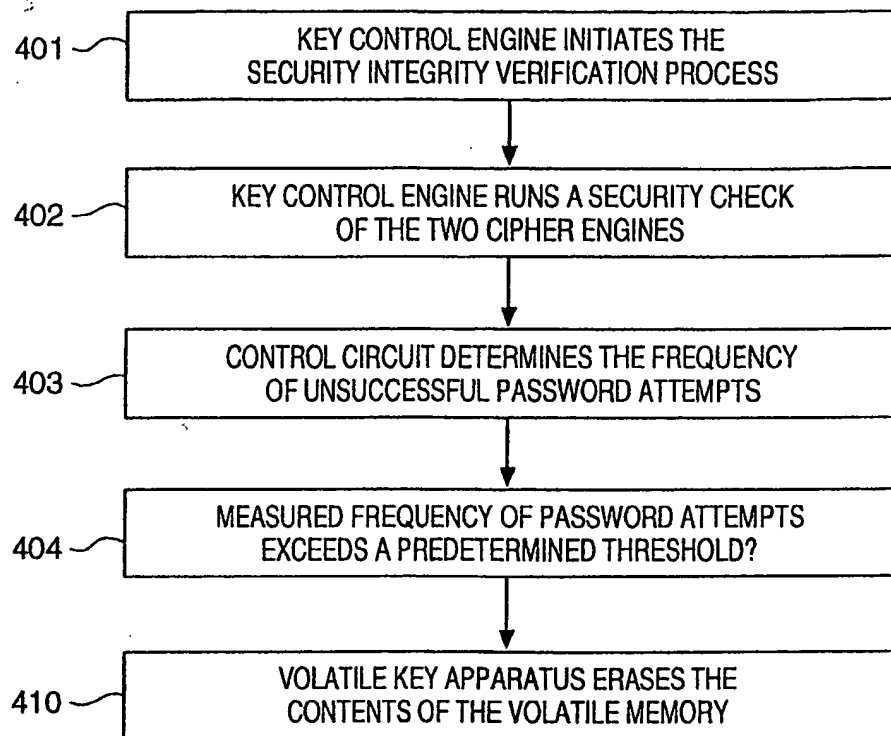


FIG. 1

**FIG. 2**

3/4

**FIG. 3**

**FIG. 4**

# INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 99/21089

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G06F1/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 675 645 A (GORMISH MICHAEL J ET AL) 7 October 1997 (1997-10-07)  the whole document	1-5, 8-11, 15, 16, 19, 20
A	EP 0 583 140 A (IBM) 16 February 1994 (1994-02-16) the whole document	1, 5, 8, 15, 19

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

23 February 2000

Date of mailing of the international search report

29/02/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Weiss, P

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/21089

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
US 5675645	A	07-10-1997	CA	2174299 A	19-10-1996
EP 0583140	A	16-02-1994	US	5224166 A	29-06-1993
			DE	69327206 D	13-01-2000
			JP	2085066 C	23-08-1996
			JP	6112937 A	22-04-1994
			JP	7107989 B	15-11-1995